MKL 1064 S




Electric proofer for 4, 6 and 10 trays ovens S


Sometimes nothing is more indispensable than an accessory. That's why we designed the MKL 1064 S, elegant in design and perfected in performance.

The ideal solution for significantly reducing rising times without compromising the sensory properties of your preparations, because the MILLENNIAL line always means top quality.







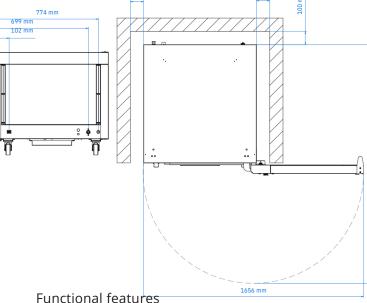

runctional reatures	
Power	Electricity
Capacity	N° 10 trays/grids 600 x 400
Steam	mm Indirect with button
Proofing chamber	AISI 430 stainless steel
Temperature	25 - 65 °C
Temperature control	Thermostat
Control panel	Electromechanic - right side
Pre-heating	

Dimensional features

850 x 1030 x 770
91
85

Electrical features

Power supply (kW)	2,4
Frequency (Hz)	50/60
Voltage (V)	AC 220/230
Voltage (V)	AC 220/230

Servicing NSW and ACT

IPX4

temperature Door

Cardboard box dimensions

with pallet (WxDxH mm)

Equipment

Cable

Lateral supports

Removable drip box

Set of wheels

Ph: 02 4879 3808 www.briquip.com.au admin@briquip.com.au

Single-phase [3G 1,5]-L=1600 mm

Right side opening

870 x 1120 x 900

1dx + 1sx

MKKR

