# **MKF 511 TS**






















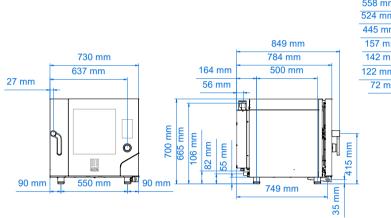





## **Dimensional features**

Dimensions (WxDxH mm)	730 x 849 x 700
Weight (kg)	78,4
Distance between rack rails (mm)	68

## **Electrical features**

Power supply (kW)	7,8
Frequency (Hz)	50/60
Voltage (V)	AC 380/400 3N
N° motors	1 bidirectional
Boiler (kW)	/
Protection against water	IPX5

## **Functional features**

Power	Electricity
Capacity	5 trays/grids 1/1 GN
Type of cooking	Semistatic + ventilated
Steam	Direct steam controlled by touch screen (10 levels)
Cooking chamber	AISI 304 stainless steel
Temperature	30 - 270 °C
Temperature control	Digital probe thermometer
Control panel	Touch screen
N° programs	500
Programmable cooking steps	10
Pre-heating temperature	180 °C
Pre-heating function	Programmable
Door	Right side opening Ventilated Inspectionable glass
Modularity	Yes
Feet	Adjustable

Optionals	
Condensation hood	MKKC 5
Vit for a real proping a prope	MKS 11
Kit for overlapping ovens	MKSST 511
Tables	MKTS 11
	MKT 11 D
Holding cabinet	MKM 1211
Other accessories	Available in the dedicated section

## Equipment

Cardboard box dimension (WxDxH mm)	ns with pallet	790 x 905 x 865 mn
Lateral supports		1 right + 1 lef
Cable	Three-phase	+neutral [5G 1,5]-L=1600 mn
USB port		
Multipoint core probe	cod. MKSCMU/A	
Support for core prob	e cod. MKSSC/A	
Automatic washing sy	stem integrated	
Condensate collection	n bowl, with drain or	n door
Hinge with door locking	for openings adjusted	d at 60°, 90°, 120°, 180°

Plus			
Patented fan guard system <b>Airflow</b>	logic™		
Patented system for direct steam <b>H</b>	umilogic™		
Patented system for cooking chamle	oer drying <b>Drylogic™</b>		
Available on request at the order	Voltage (V) : AC 220/230 3 PH		
	Voltage (V) : AC 220/230		
	Left side opening door		
Humidity management software			
Wi-Fi communication system			
Knob for quick selection of the touc	ch screen		
Programmable oven start			

N° 40 recipes stored Control panel in 42 languages:

Arabic, Armenian, Azerbaijani, Bahasa (Indonesia), Bahasa (Malaysia), Bosnian, Bulgarian, Chinese, Croatian, Czech, Danish, Dutch, English, Estonian, Finnish, French, Georgian, German, Greek, Hungarian, Icelandic, Italian, Japanese, Kazakh, Latvian, Lithuanian, Norwegian, Persian (Iran), Philippine, Polish, Portuguese, Romanian, Russian, Serbian, Slovenian, South Korean, Spanish, Swedish, Thai, Turkish, Ukrainian,

vietriarriese
HACCP system
Adjustable door hinges